


B.13

EPS CORE REFRIGERATED BUILDINGS

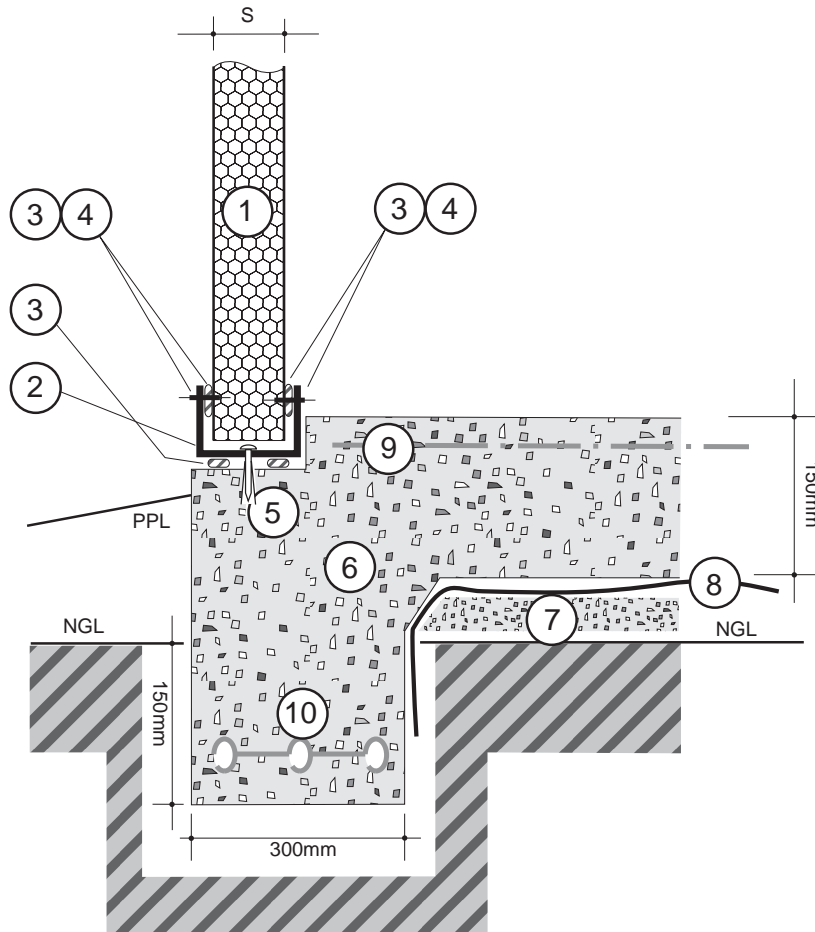

OPTIONS

- 7
- 8
- 9
- 10

			S	100	125	150	200	250
1	ECONOTILT PANEL	S= mm						
2	CHANNEL	100 x 35 x 2mm						ALUMINIUM
3	SEALANT	continuous bead						NON-SETTING FLEXIBLE
4	POP RIVET mm @ 600mm ctrs.						
5	DRIVE NAIL mm @ 600mm ctrs.						STAINL. STEEL
6	REINFORCED SLAB							CONCRETE
7	PACKED LAYER	50mm						SAND
8	WATERPROOF MEMBRANE	200um thickness						POLYTHENE FILM
9	MESH	F7.2						STEEL
10	TRENCH MESH	F8						STEEL
POS	ITEM & DIMENSIONS		MATERIAL					



Econotilt™ Panel
WALL TO FLOOR DETAIL
 Typical edge beam (Factory)

18.10.01
 SCALE
 NTS