


B.15 EPS CORE REFRIGERATED BUILDINGS



			S	100	125	150	200	250
1	ECONOTILT PANEL	S= mm						
2	CHANNEL	100 x 35 x 2mm						ALUMINIUM
3	FLASHING gauge						GALV. STEEL
4	SEALANT	continuous bead						NON-SETTING FLEXIBLE
5	DRIVE NAIL mm @ 600mm ctrs.						STAINL. STEEL
6	POP RIVET mm @ 600mm ctrs.						
7	REINFORCED SLAB							CONCRETE
POS	ITEM & DIMENSIONS							MATERIAL

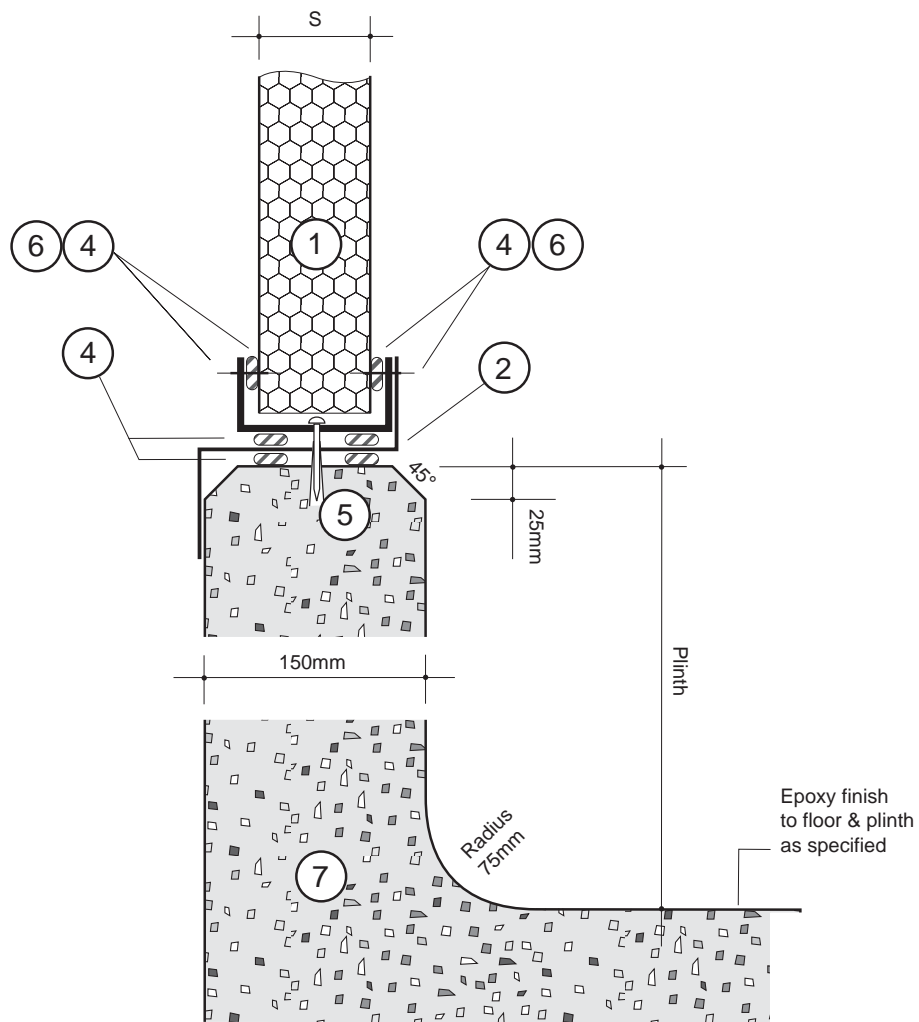

Econotilt™ Panel WALL TO PLINTH DETAIL

25.10.01
SCALE
NTS